

### Features & Advantages

- + The higher flow design provides maximum flow rates with minimal pressure drops.
- + 2 1/8" or 4" valve center options allow the manifold to be sized for specific D03 valve types.
- + Standard end mount and through holes make mounting easy and flexible. Also, a mounting bracket kit BKR-AH03 is supplied with the manifold as an alternative mounting style.
- + Available with SAE, NPT, BSPP, BSPT or Metric Threads to cover a wide range of applications.
- + Options include relief valve cavity, bottom PR & TK ports, and gauge ports to fit specific circuit requirements.

### Dimensions (2.13" Valve Spacing)

No. of Stations	C	L	E	F
1 <sup>1</sup>	--	3.13"	2.38"	-
1 <sup>2</sup>	--	4.00"	3.50"	-
2	2.13"	5.25"	4.50"	-
3	2.13"	7.38"	6.63"	-
4	2.13"	9.50"	8.75"	-
5	2.13"	11.63"	10.88"	6.50"
6	2.13"	13.75"	13.00"	6.50"
7	2.13"	15.88"	15.13"	6.50"
8	2.13"	18.00"	17.25"	8.63"
9	2.13"	20.38"	19.38"	8.63"
10	2.13"	22.25"	21.50"	10.75"
11	2.13"	24.38"	23.63"	8.63" & 17.13"
12	2.13"	26.50"	25.75"	8.63" & 17.13"

Note: 1 - Single Station - No Gauge Port

2 - Single Station with C or S Option, includes Gauge Port.

### Dimensions (4.00" Valve Spacing)

No. of Stations	C	L	E	F
2	4.00"	7.13"	6.38"	-
3	4.00"	11.13"	10.38"	-
4	4.00"	15.13"	14.38"	7.18"
5	4.00"	19.13"	18.38"	7.18"
6	4.00"	23.13"	22.38"	11.18"
7	4.00"	27.13"	26.38"	11.18"
8	4.00"	31.13"	30.38"	11.18" & 23.18"

## MAGNALOY D03 PARALLEL BAR MANIFOLD PART NUMBER BREAKDOWN

**B M R - S H P 0 3 S 2 - 0 2 - 1 / B**

Product Code \_\_\_\_\_  
BMR-Inline Bar Manifold  
Retro Design

Material Code \_\_\_\_\_  
A - Aluminum  
S - Ductile/Steel

Circuit Code \_\_\_\_\_  
HP- High Flow Parallel Circuit

NFPA Pattern Code \_\_\_\_\_  
03 - D03

Thread Code \_\_\_\_\_  
P - NPTF Pipe  
S - SAE O'Ring  
B - BSPP British Parallel  
T - BSPT British Taper  
M - Metric ISO 6149

(See Port Chart for Standard Port Sizes)

Options

- Z - No Option
- B - Bottom PR-TK Ports (2 or more Stations)
- C - Relief Valve Cavity C-16-2
- G4 - Gauge Port #4 SAE
- S - Relief Valve Cavity Sun T-3A
- M - Soft Metric Threading (See Note 3, page 34)
- I - Isolation Plug <sup>1</sup> - List as last option designated


(See Note 1, page 34)

Design Series

- Number of Valve Stations
- 01 - 1 station
- 02 - 2 stations
- etc.

- Valve Spacing Code
- 2 - 2.13"
- 4 - 4.00"

# Inline Bar Manifold D03 High Flow Retro Design Bar Manifold - Parallel

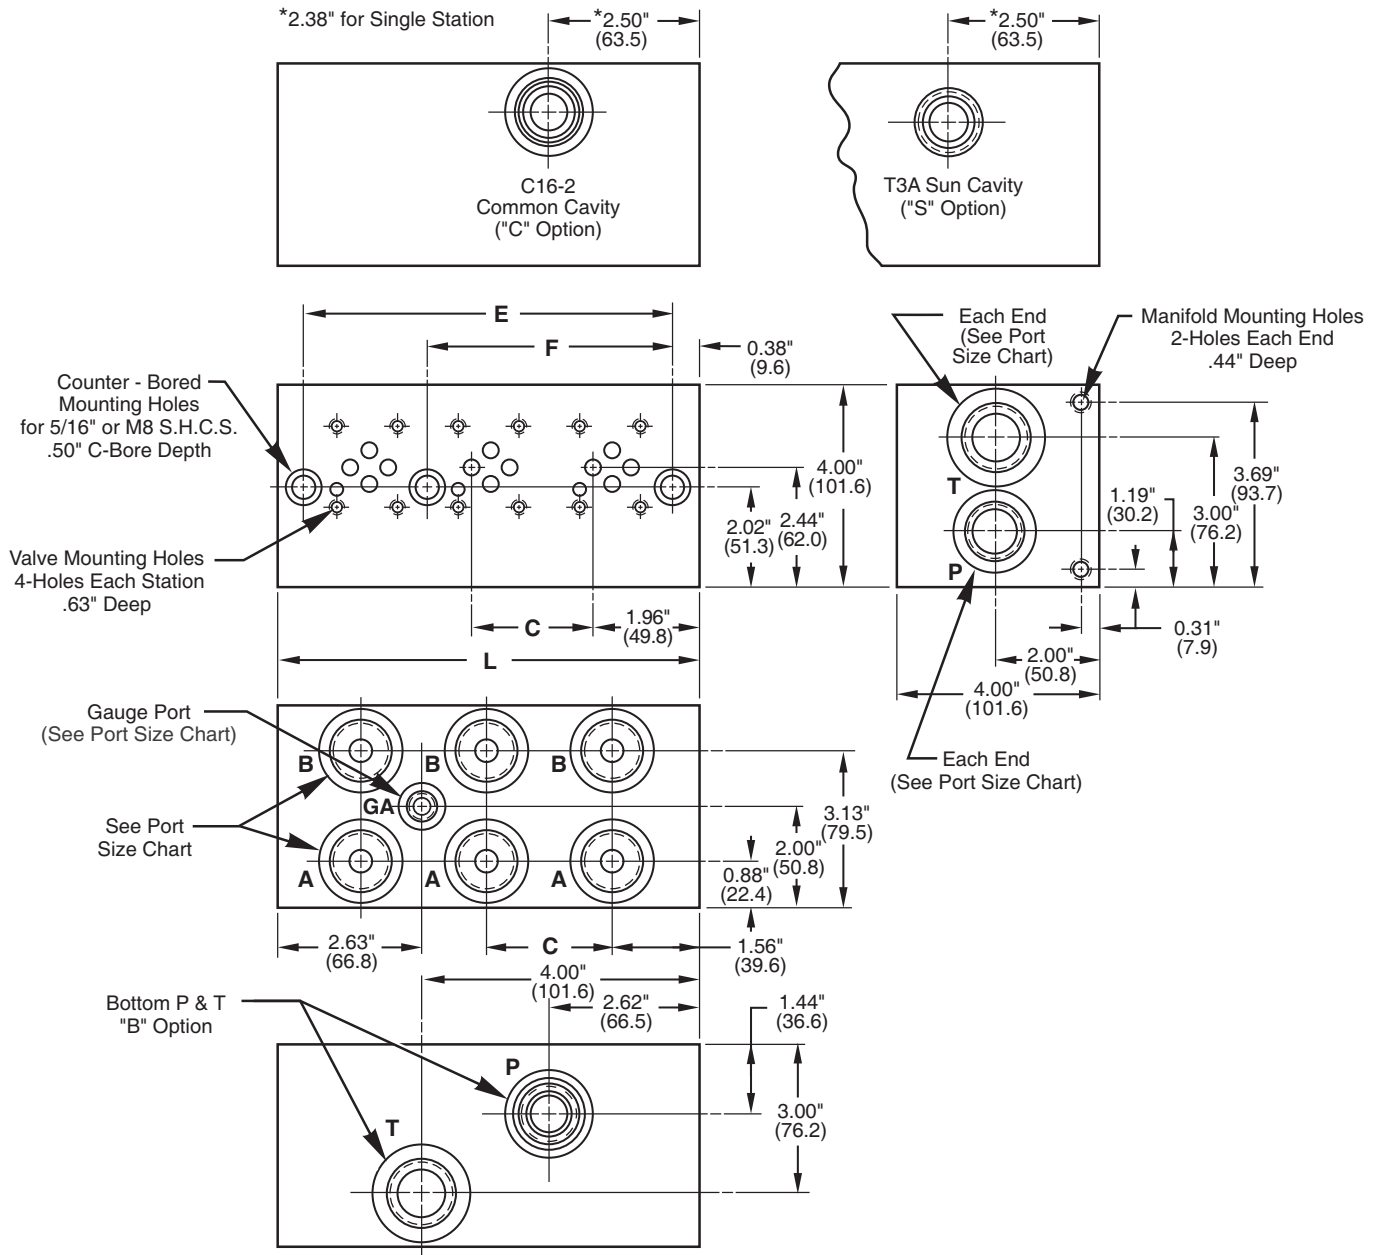

3

**Port Size Chart**

Thread Code	PR	TK	A & B	Gauge Ports	Mounting Holes	
					Valve	Manifold
P	3/4" NPT	1" NPT	3/4" NPT	1/4" NPT	10-24 UNC	5/16-18 UNC
S	#12 SAE	#16 SAE	#12 SAE	G4 - #4 SAE #6 SAE	10-24 UNC	5/16-18 UNC
B	3/4" BSPP	1" BSPP	3/4" BSPP	-	M5x.8	M8x1.25
T	3/4" BSPT	1" BSPT	3/4" BSPT	-	M5x.8	M8x1.25
M	M27x2	M33x2	M27x2	-	M5x.8	M8x1.25

**Note:** For **Mounting Bracket Kit (BKR-AH03)** dimensions, see Reference Section, page 174.